

## **OIV-MA-AS2-07B Chromatic characteristics**

### **Type IV method**

#### **1. Definitions**

The "chromatic characteristics" of a wine are its luminosity and chromaticity. Luminosity depends on transmittance and varies inversely with the intensity of color of the wine. Chromaticity depends on dominant wavelength (distinguishing the shade) and purity.

Conventionally, and for the sake of convenience, the chromatic characteristics of red and rosé wines are described by the intensity of color and shade, in keeping with the procedure adopted as the working method.

#### **2. Principle of the methods**

(applicable to red and rosé wines)

A spectrophotometric method whereby chromatic characteristics are expressed conventionally, as given below:

- The intensity of color is given by the sum of absorbencies (or optical densities) using a 1 cm optical path and radiations of wavelengths 420, 520 and 620 nm.
- The shade is expressed as the ratio of absorbance at 420 nm to absorbance at 520 nm.

#### **3. Method**

##### *3.1. Apparatus*

3.1.1. Spectrophotometer enabling measurements to be made between 300 and 700 nm.

3.1.2. Glass cells (matched pairs) with optical path  $b$  equal to 0.1, 0.2, 0.5, 1 and 2 cm.

##### *3.2. Preparation of the sample*

If the wine is cloudy, clarify it by centrifugation; young or sparkling wines must have the bulk of their carbon dioxide removed by agitation under vacuum.

##### *3.3. Method*

The optical path  $b$  of the glass cell used must be chosen so that the measured absorbance  $A$ , falls between 0.3 and 0.7.

Take the spectrophotometric measurements using distilled water as the reference liquid, in a cell of the same optical path  $b$ , in order to set the zero on the absorbance

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Chromatic Characteristics (Type-IV)

scale of the apparatus at the wavelengths of 420, 520 and 620 nm.

Using the appropriate optical path  $b$ , read off the absorbencies at each of these three wavelengths for the wine.

### 3.4. Calculations

Calculate the absorbencies for a 1 cm optical path for the three wavelengths by dividing the absorbencies found ( $A_{420}$ ,  $A_{520}$  and  $A_{620}$ ) by  $b$ , in cm.

### 3.5. Expression of Results

The color intensity  $I$  is conventionally given by:

$$I = A_{420} + A_{520} + A_{620}$$

and is expressed to three decimal places.

The shade  $N$  is conventionally given by:

$$N = \frac{A_{420}}{A_{520}}$$

and is expressed to three decimal places.

Table 1

Converting absorbance into transmittance (T%)

*Method:* find the first decimal figure of the absorbance value in the lefthand column (0-9) and the second decimal figure in the top row (0-9).

Take the figure at the intersection of column and row: to find the transmittance, divide the figure by 10 if absorbance is less than 1, by 100 if between 1 and 2 and by 1000 if between 2 and 3.

*Note:* The figure in the top right hand corner of each box enables the third decimal figure of the absorbance to be determined by interpolation.

	0	1	2	3	4	5	6	7	8	9
0	23 1000	22 977	22 955	21 933	21 912	20 891	20 871	19 851	19 932	19 813
1	18 794	18 776	17 759	17 741	16 724	16 708	16 692	15 676	15 661	15 646
	14	14	14	14	13	13	13	12	12	12

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Chromatic Characteristics (Type-IV)

2	631	617	603	589	575	562	549	537	525	513
	11	11	11	11	10	9	9	10	10	9
3	501	490	479	468	457	447	436	427	417	407
	9	9	9	8	8	8	8		7	8
4	398	389	380	371	363	355	347	339	331	324
	7		7	7	6	7	6	6	6	6
5	316	309 71	302	295	288	282	275	269	263	257
	6	5	6	5	5	5	5	5	5	5
6	251	245	240	234	229	224	219	214	209	204
	4	5	4	4	4		4	4	4	4
7	199	195	190	186	182	178	174	170	166	162
	3	4	3	4	4	3	3	3	3	3
8	158	155	151	148	144	141	138	135	132	129
	3	3	3	2	3	2	3	2	3	2
9	126	123	120	117	115	112	110	107	105	102

*Example:*

Absorbance            0.47                            1.47                            2.47                            3.47

T%                            33.9%                            3.4%                            0.3%                            0%

Transmittance (T%) is expressed to the nearest 0.1%.

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Chromatic Characteristics (Type-IV)

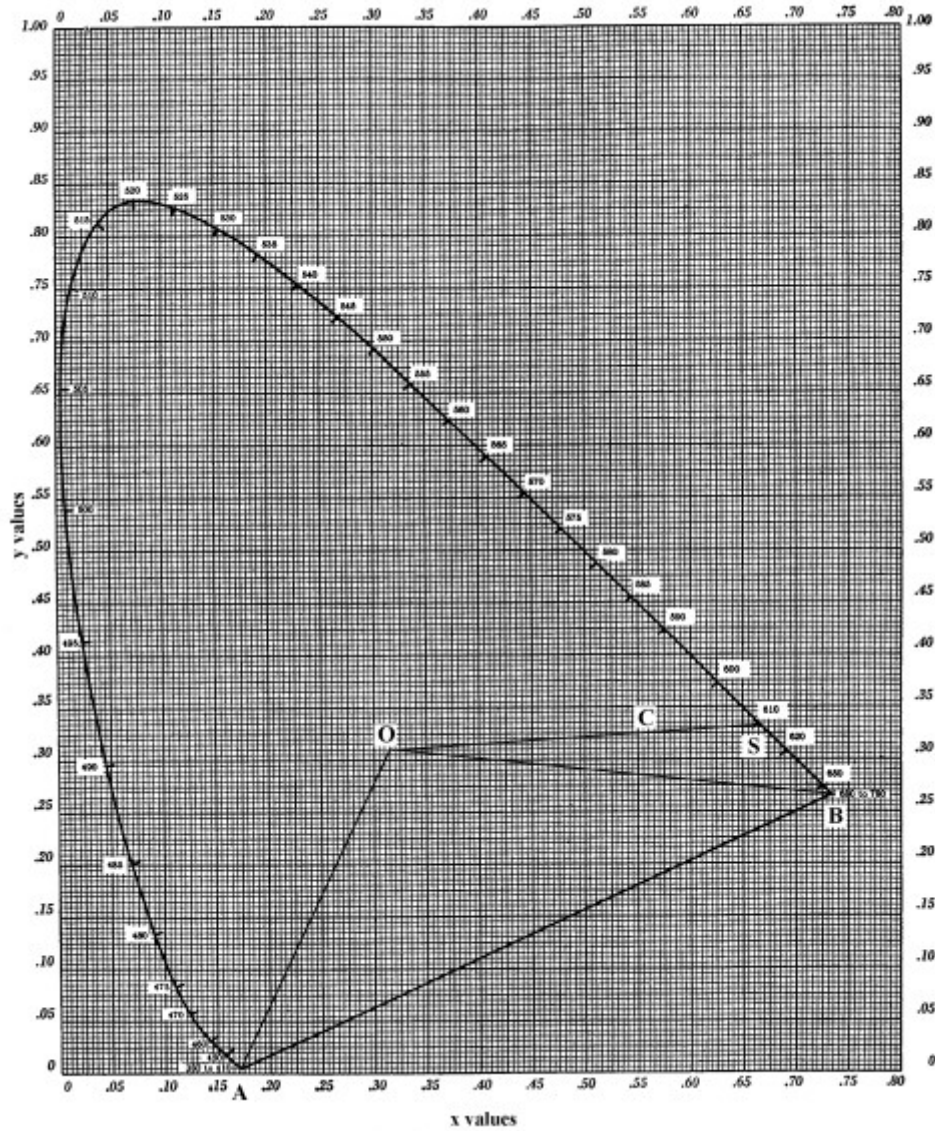


Figure 1: Chromaticity diagram, showing the locus of all colors of the spectrum

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Chromatic Characteristics (Type-IV)

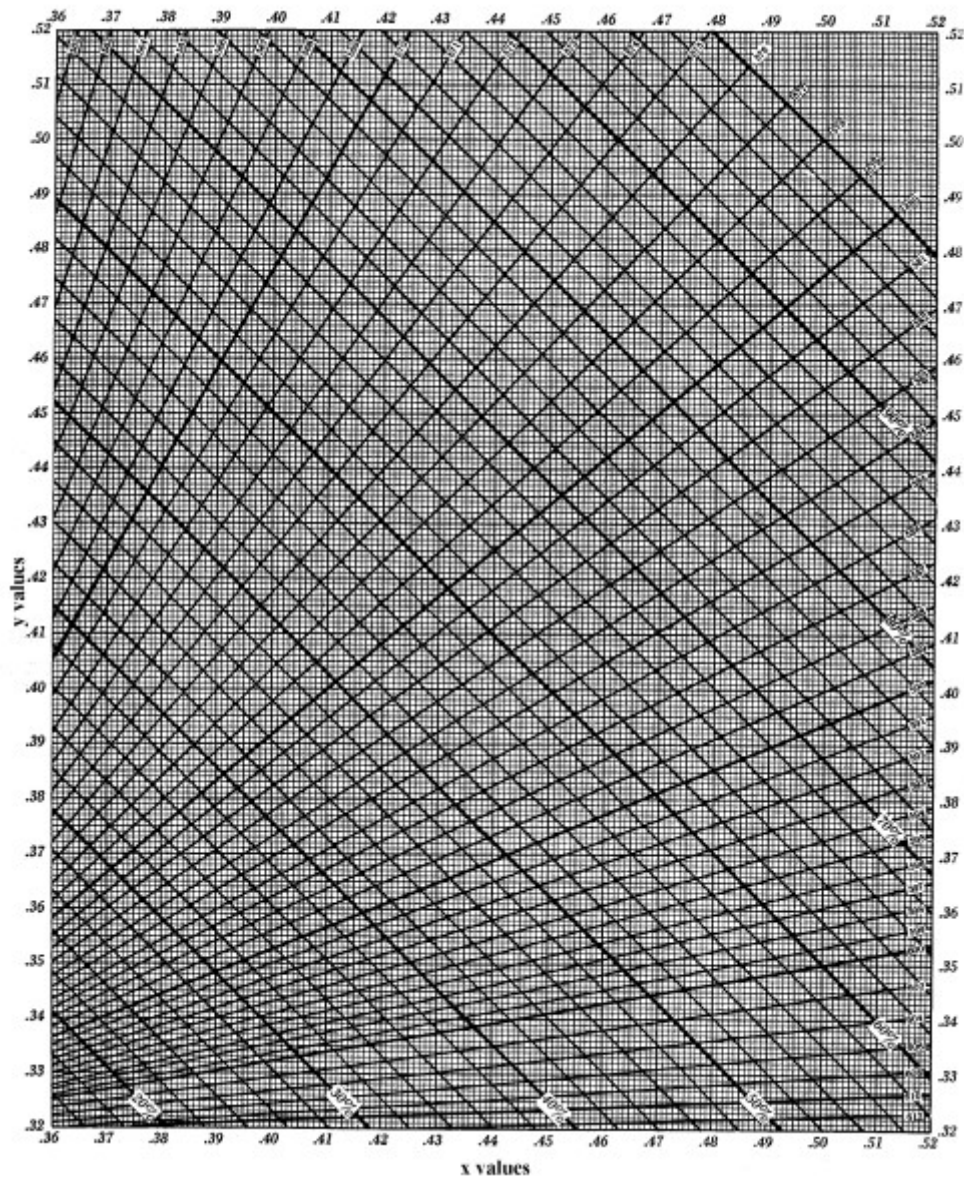


Figure 2: Chromaticity diagram for pure red wines and brick red wines

Chromatic Characteristics (Type-IV)

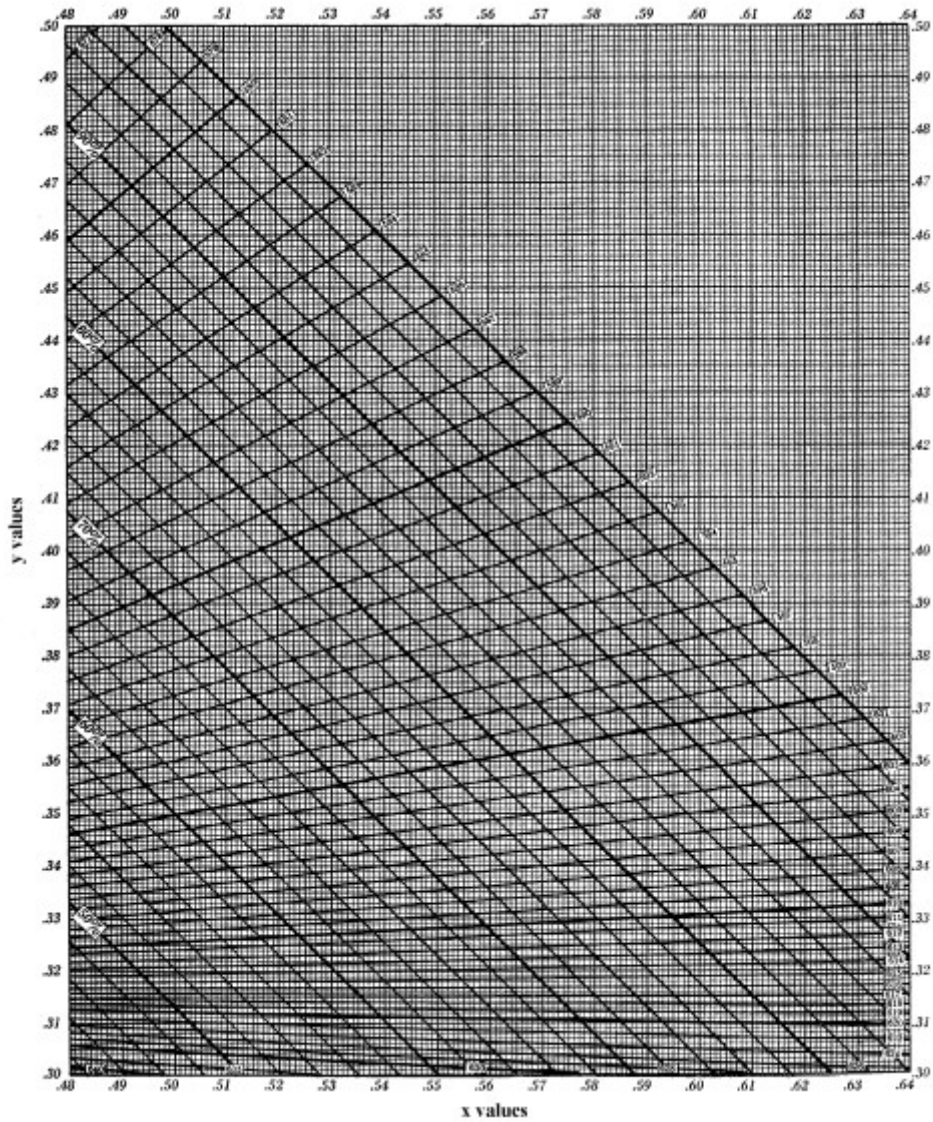


Figure 3: Chromaticity diagram for pure red wines and brick red wine

Chromatic Characteristics (Type-IV)

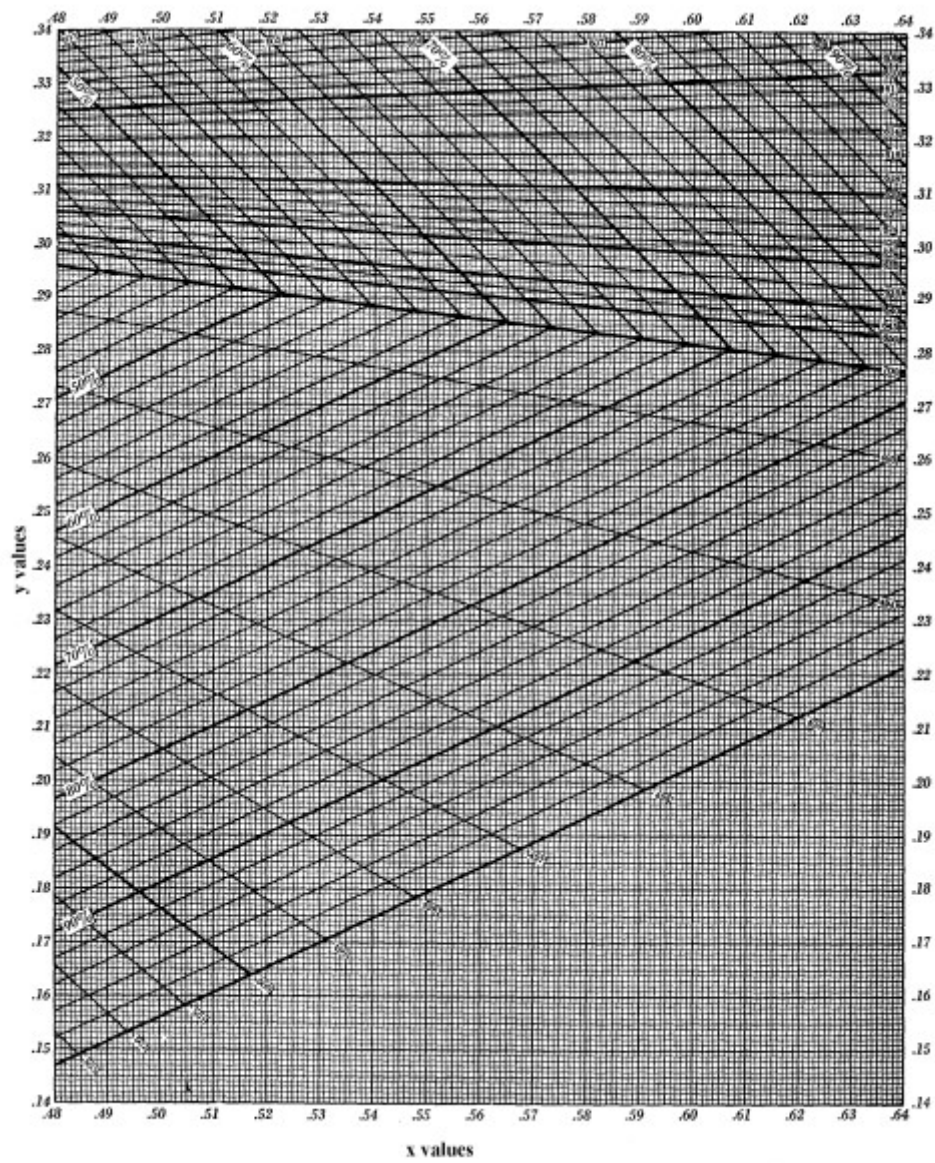


Figure 4:Chromaticity diagram for pure red wines and purple wines



Chromatic Characteristics (Type-IV)

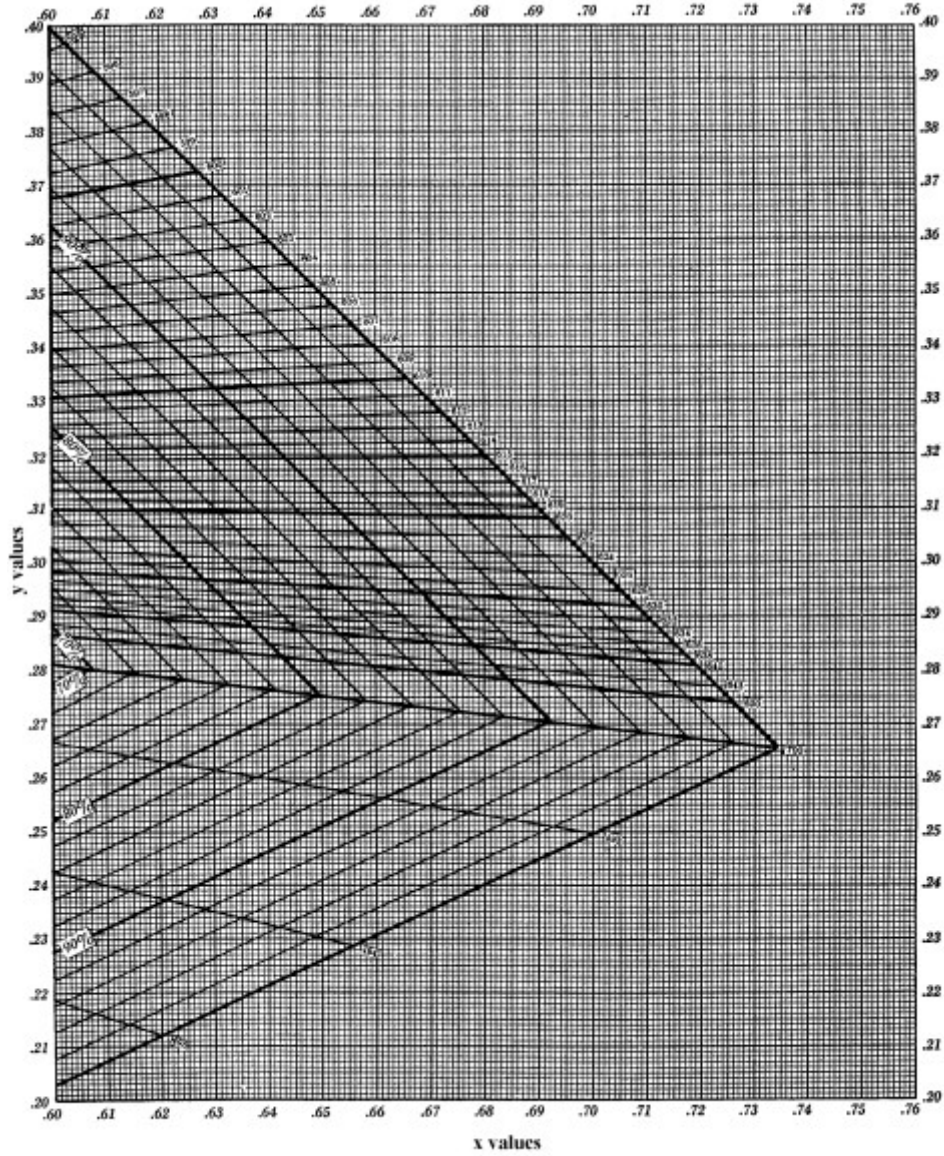


Figure 5:Chromaticity diagram for pure red wines and purple red wines



Chromatic Characteristics (Type-IV)

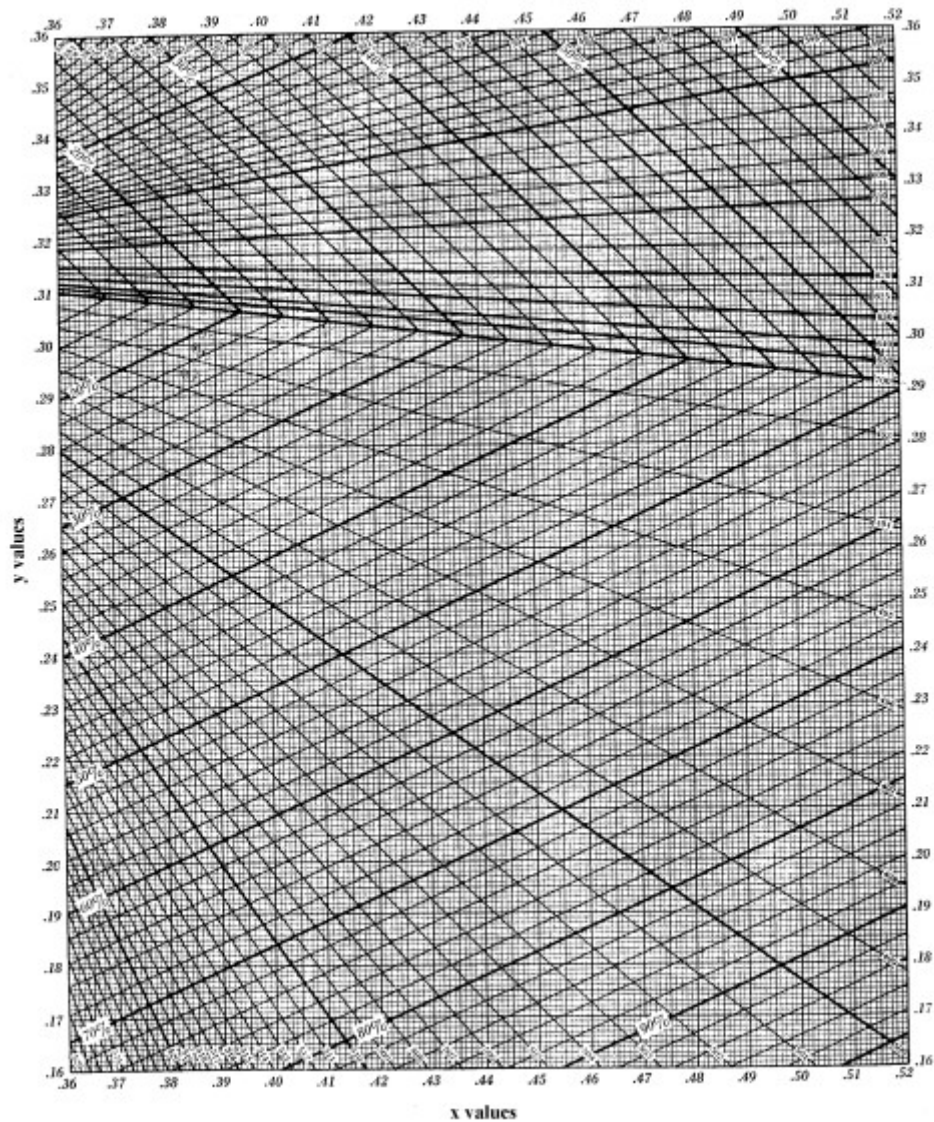


Figure 6: Chromaticity diagram for brick red wines and purple red wines

**Bibliography:**

- BOUTARIC A., FERRE L., ROY M., *Ann. Fals. Fraudes*, 1937, 30, 196.
- SUDRAUD P., *Ann. Technol. Agric.*, 1958, no 2, 203.
- MARECA CORTES J., *Atti Acc. Vite Vino*, 1964, 16.
- GLORIES Y., *Conn. vigne et Vin*, 1984, 18, no 3, 195.